

ADA Suitable, Adjustable Hydraulic Closer for Gates up to 330 Pounds

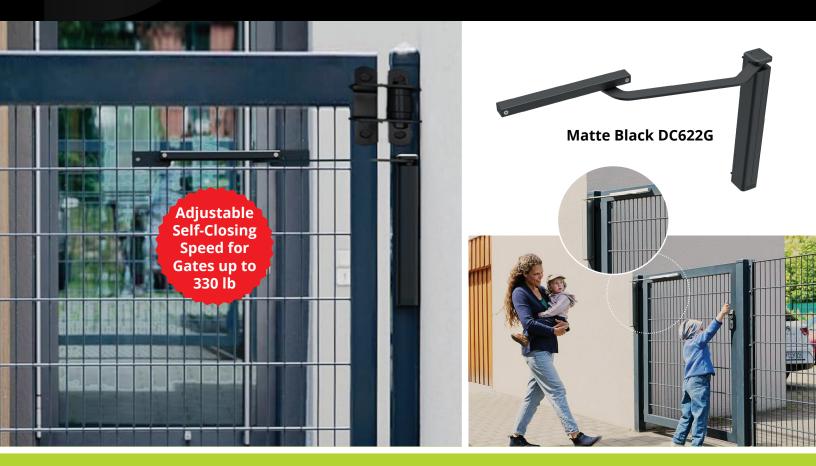


Minimal, slimline design, mounted vertically

- Versatile Installation 14 Mounting Options
 - ♦ Mounts on metal gates or brick and concrete walls & on the push or pull side of the gate
 - ♦ Mounts internally or externally & on the top or bottom rails or pickets
 - ♦ Left- and right-hand opening models available
- Ideal for retrofits Perfect for single gates with existing hinges
- Gate gap The closer will accommodate any gap that results from commonly used hinges
- Adjustable Closing and latch speeds can be adjusted independently
- Self-closes gates up to 330 lb (150kg)
- ADA suitable on gates 32" (813mm) or wider
- Allows easy opening Featuring innovative * 3D Cam-Motion® Technology
- **Easy to install** No welding required. Closer supplied with A152: mechanical hold-open device. A153: mechanical opening damper. Guide rail and fasteners
- Versatile Compatibility Install with face or center mounted hinges
- All-Weather Performance: Wide temperature range: -22°F (-30°C) to +122°F (+50°C)

CODE	PRODUCT NAME	MAX GATE WEIGHT	MAX GATE WIDTH	MAX OPENING ANGLE
DC622G-L-9004	Vertical Gate Closer Left Hand, Black	330 lb. (150kg)	51" (1,295mm)	130° *Mounting application may limit max opening angle
DC622G-R-9004	Vertical Gate Closer Right Hand, Black			
DCA632-9004	Mounting Plate for Guide Rail	Required to mount to fence pickets		
DCA633-9004	Mounting Bracket Kit for Body	Use when installing the closer on push side posts and on pull side walls.		

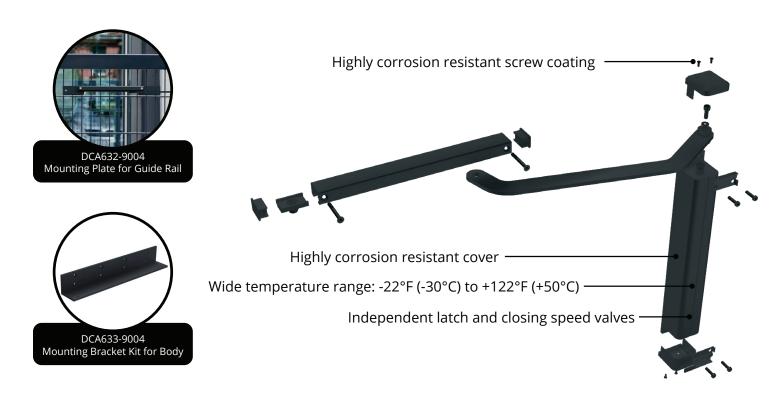


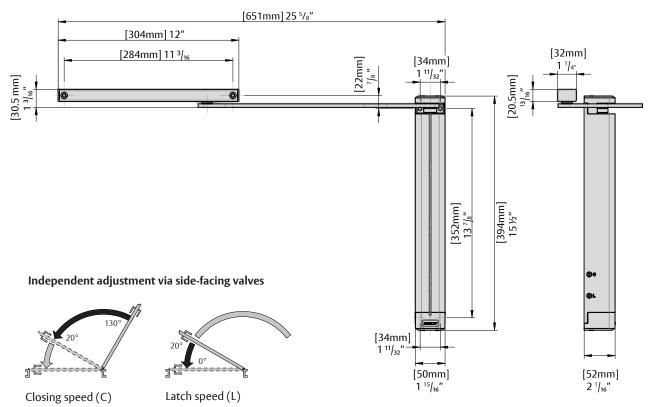

14 Versatile Mounting Options

Mounting Plate for Guide Rail (DCA632-9004) must be installed when closer is mounted on fence pickets.

Post - Pull side

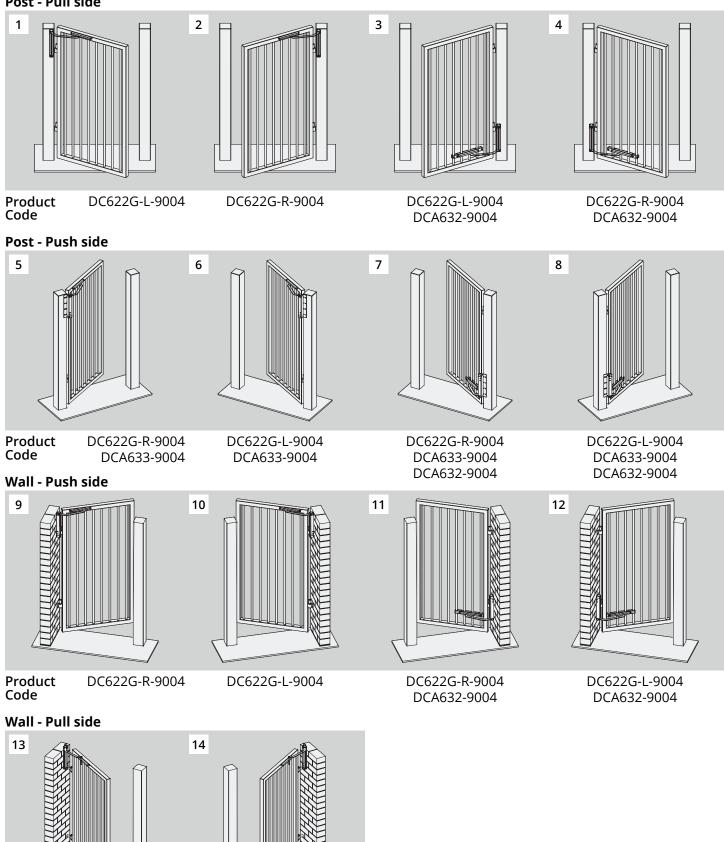

Code DCA633-9004 DCA633-9004

DC622G-R-9004

DC622G-L-9004


Product

Feel the difference with Cam-Motion® technology

Every user, young or old, opens your gate effortlessly and safely

The DC622G Gate Closer, powered by 3D Cam-Motion® technology, brings high-end door performance to pedestrian and security gates. The DC622G requires less effort to open the gate, ensuring comfortable operation and barrier-free access for all. The closer shuts the gate tight without force. Unlike traditional door- and gate-closing technology, 3D Cam-Motion® does the heavy lifting, so your customers don't have to.

Compared to rack-and-pinion closers with guide rails, the DC622G with Cam-Motion® does not need to be pulled or pushed so hard (see the graph, below). It is easier on a person's arms — and built for the natural power of the human elbow. Opening a gate with the DC622G closer is easy and comfortable, especially for younger children, elderly and the less-able.

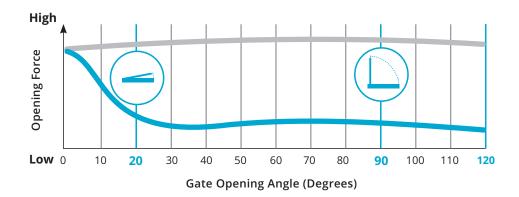

Typical symmetric rack-and-pinion with guide rail

Cam-Motion®

